


As with any decking surface, periodic cleaning will help keep your deck looking new. The following are suggested cleaners for occasional maintenance:

- Olympic® Premium Deck Cleaner
- Behr® 63 Deck Wash
- Jomax® Deck Cleaner
- Concrobium XT Eco-Wash™ (non-bleach)

For access to the support surface during maintenance, you can simply lift a tile or tiles straight up.

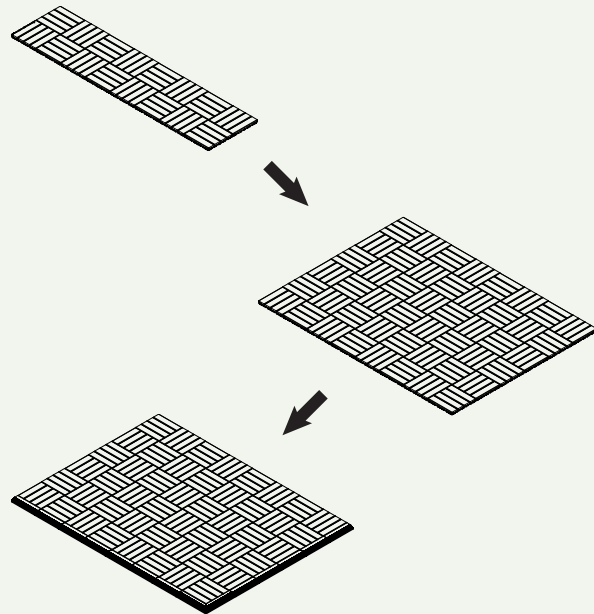

For more information about EcoShield Deck Tiles, please visit our website at moistureshield.com or call Customer Service at **866.729.2378**.



EcoShield™ Installation Guide


MoistureShield® is a registered trademark and EcoShield™ and Snap-To™ are trademarks of Advanced Environmental Recycling Technologies, Inc.

© 2010 Advanced Environmental Recycling Technologies, Inc.

Introduction

1

Congratulations on your selection of MoistureShield® EcoShield™ Deck Tiles. Creating an EcoShield deck is an easy way to build a beautiful outdoor space. Developed with Snap-To™ technology, the installation is literally a snap and doesn't require any special tools.

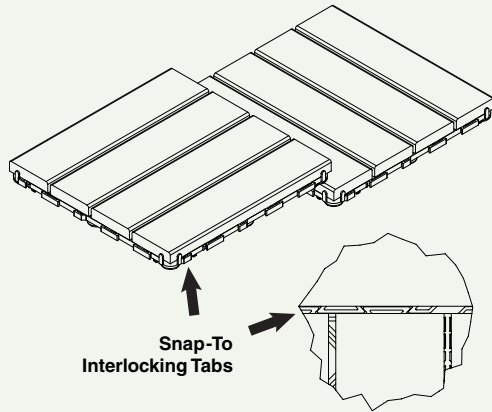

Prepping Your Space

2

Prior to getting started, you need to make sure your support surface is flat since your EcoShield deck tile system will conform to the contour of the support surface. Your surface should be free of holes, debris and any surface variations.


Repair holes that may result in low spots and level any high spots in the support surface. If you are installing your deck tiles over gravel, crushed stone etc., ensure that the surface is uniform in thickness and is level.



Installation


3

The base of the EcoShield deck tile is designed to interlock with adjacent tiles to form a secure, attractive surface for your roof garden, balcony or patio area.

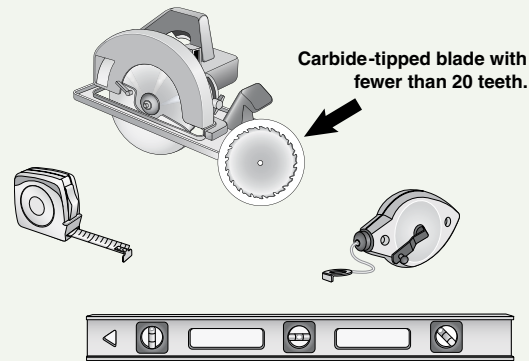

BALCONIES AND ROOFS:

1. Run a chalk line on the support surface to align the system. Individual tiles in the system self align through the interlocking bases.
2. Install the first row of tiles opposite the wall of the building.
3. Work toward the wall of the building in parallel rows.
4. Using a circular saw, trim the tile and base as necessary* to conform to the wall of the building.

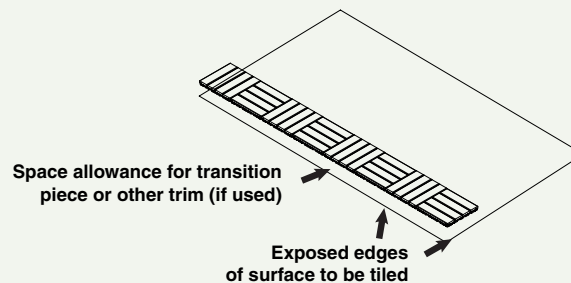


Installation Continued

3b

PATIOS:

1. On the outside of the outer row of tiles, install the edge tiles.
2. At the outer corner, install the mitered edges to finish the corner.
3. Along the outer row of tiles, install the straight edge finish tiles.
4. Complete rows of tiles parallel to the primary wall of the building and work toward the building.
5. Trim the tiles as needed* to conform to the wall or walls of the building.
6. Leave ¼" spacing between the deck tiles and the edge of the structure to allow for proper drainage.

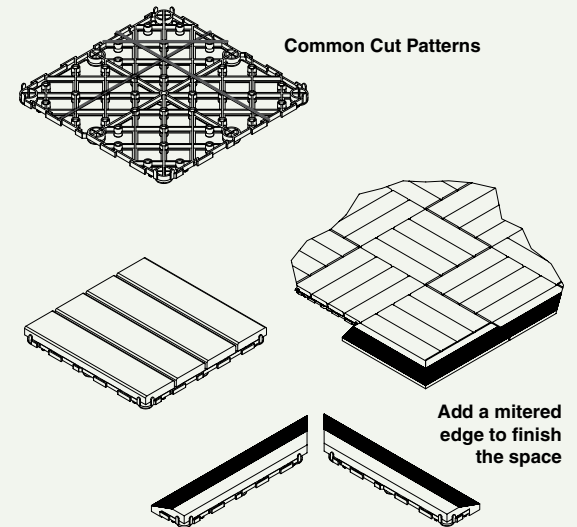

* Please refer to the diagram for standard recommended cut patterns. If you need to cut the tile in an alternate pattern, it may be necessary to reposition the fasteners that connect the composite material to the base in order to secure the individual components.